



Balmain Battery Discount Store





16 Mansfield Street, Rozelle NSW 2039
 (02) 9555 9444 - 0425 286 700



Absorbed Power AGM GT12-200C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-200C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (10.1 A, 1.75V)	10HR (20A, 1.75V)	5HR (37A, 1.75V)	1HR (138A, 1.75V)
	202Ah	200Ah	185Ah	138Ah
Dimensions	Length	Width	Height	Total Height
	530mm (20.55inch)	238mm (9.37inch)	218mm (8.58inch)	236mm(9.29inch)
Approx. Weight	61Kg (134.5 lbs)			
Internal Resistance	Full charged at 25°C: 0.0038 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 50A		13.6-13.8(-20mV/ °C)	
CCA	1200			
Terminal Type	M6 Threaded Insert			

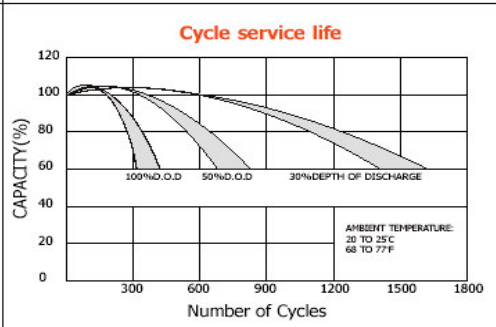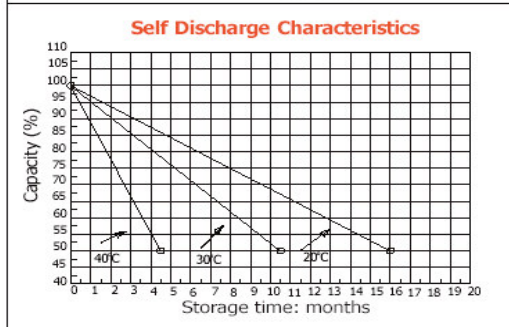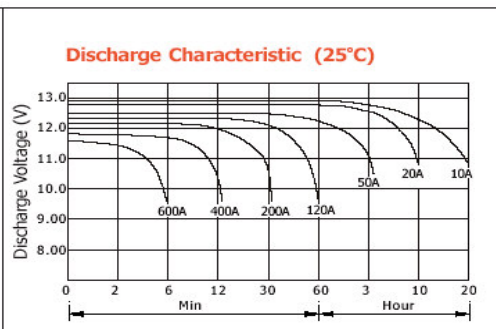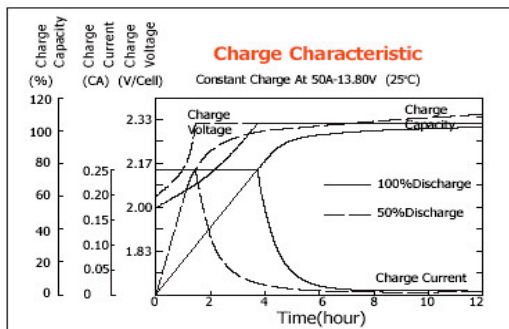

Applications

- Car Audio
- Cruiser / Yacht
- General Marine
- House Boat
- Caravan / Camper
- 4WD
- Radio / Comms Support
- Standby Power
- Truck
- House Batteries

24 month warranty
Refer to warranty
policy for terms and
conditions

